




Lower panel for on-board monitor (control panel).

*Note:*


Panel for on-board monitor (control panel) returns to its initial position after 15 seconds.

Detach frame for on-board monitor (1) in direction of arrow.

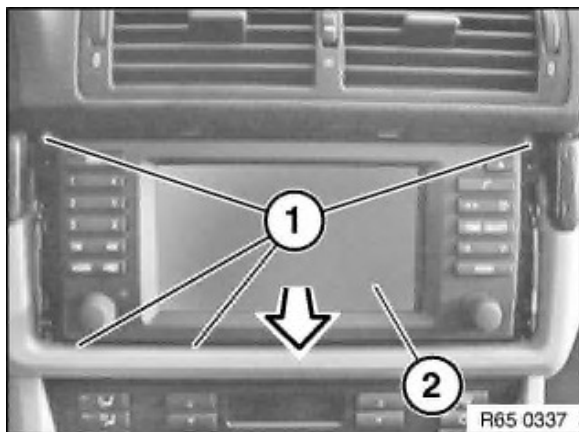

Release screws (1).

Pull out complete on-board monitor (2) in direction of arrow.

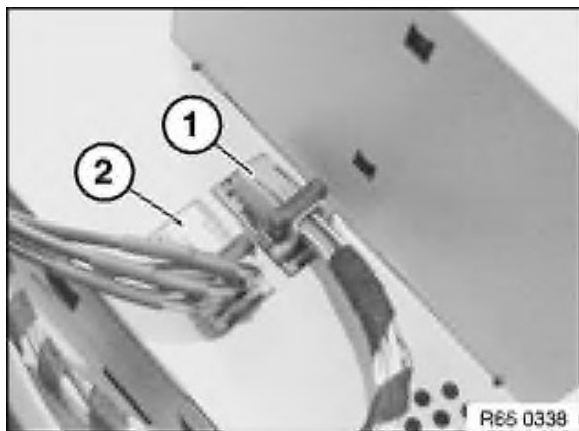

Unlock plug connections (1) and (2) and disconnect.  
Remove complete on-board monitor.